





Body: **Aluminium**  
Stem: **Stainless Steel A2**  
Dome head







Hülse: **Aluminium**  
Dorn: **Edelstahl A2**  
Flachrundkopf

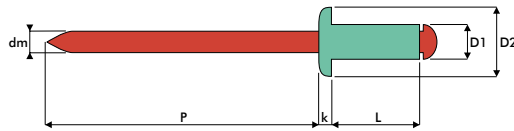

Cuerpo: **Aluminio**  
Vástago: **Inox A2**  
Remache alomada



DIN EN ISO 15977

D1	L	 min - max		D2	k max.	dm ref.	p min.	 [N]	 [N]	code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
3.0	6.0	1.5 - 3.5	3.1	6.3	1.0	1.70	26	800	500	10AX13006
	8.0	3.5 - 5.0								10AX13008
	10.0	5.0 - 7.0								10AX13010
	12.0	7.0 - 9.0								10AX13012
	14.0	9.0 - 11.0								10AX13014
	16.0	9.0 - 13.0								10AX13016
3.2	6.0	1.5 - 3.5	3.3	6.3	1.0	1.75	26	980	760	10AX13206
	8.0	3.5 - 5.0								10AX13208
	10.0	5.0 - 7.0								10AX13210
	12.0	7.0 - 9.0								10AX13212
	14.0	9.0 - 11.0								10AX13214
	16.0	9.0 - 13.0								10AX13216
4.0	6.0	1.0 - 3.0	4.1	8.0	1.3	2.15	27	1600	1200	10AX14006
	8.0	3.0 - 5.0								10AX14008
	10.0	5.0 - 6.5								10AX14010
	12.0	6.5 - 8.5								10AX14012
	14.0	7.5 - 9.5								10AX14014
	16.0	8.5 - 12.5								10AX14016
	18.0	11.0 - 15.0								10AX14018
	20.0	12.5 - 16.5								10AX14020
4.8	8.0	2.5 - 4.0	4.9	9.5	1.4	2.63	28	2230	1690	10AX14808
	10.0	4.0 - 6.0								10AX14810
	12.0	6.0 - 8.0								10AX14812
	14.0	7.0 - 9.0								10AX14814
	16.0	8.0 - 12.0								10AX14816
	18.0	11.0 - 13.0								10AX14818
	20.0	12.0 - 15.0								10AX14820
	25.0	15.0 - 20.0								10AX14825
30.0	20.0 - 25.0								10AX14830	

# Q-STANDARD





Body: **Aluminium**  
Stem: **Stainless Steel A2**  
Dome head







Hülse: **Aluminium**  
Dorn: **Edelstahl A2**  
Flachrundkopf

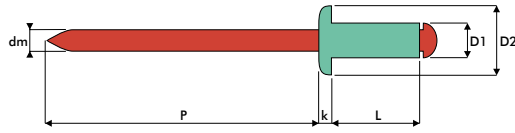

Cuerpo: **Aluminio**  
Vástago: **Inox A2**  
Remache alomada



DIN EN ISO 15977

D1	L	 min - max		D2	k max.	dm ref.	p min.	 [N]	 [N]	code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
<b>5.0</b>	<b>8.0</b>	2.5 - 4.0	5.1	9.5	1.4	2.63	28	2500	2000	<b>10AX15008</b>
	<b>10.0</b>	4.0 - 6.0								<b>10AX15010</b>
	<b>12.0</b>	6.0 - 8.0								<b>10AX15012</b>
	<b>14.0</b>	7.0 - 9.8								<b>10AX15014</b>
	<b>16.0</b>	8.0 - 12.0								<b>10AX15016</b>
	<b>18.0</b>	11.0 - 13.0								<b>10AX15018</b>
	<b>20.0</b>	12.0 - 15.0								<b>10AX15020</b>
	<b>25.0</b>	15.0 - 20.0								<b>10AX15025</b>
<b>30.0</b>	20.0 - 25.0								<b>10AX15030</b>	
<b>6.0</b>	<b>8.0</b>	2.0 - 3.0	6.1	12.0	1.9	3.19	30	3900	3000	<b>10AX16008</b>
	<b>10.0</b>	3.0 - 5.0								<b>10AX16010</b>
	<b>12.0</b>	5.0 - 7.0								<b>10AX16012</b>