





Body: **Aluminium**
Stem: **Steel**
Large head





Hülse: **Aluminium**
Dorn: **Stahl**
Großkopf



Cuerpo: **Aluminio**
Vástago: **Acero**
Remache cabeza ancha

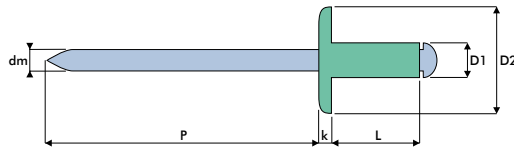

DIN EN ISO 15977

D1	L	 min - max	 mm	D2	k max.	dm ref.	p min.	 [N]	 [N]	code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
3.2	6.0	1.5 - 3.0	3.3	9.5	1.2	1.75	26	1100	750	10AS23206
	8.0	3.0 - 5.0	10AS23208							
	10.0	5.0 - 7.0	10AS23210							
	12.0	7.0 - 9.0	10AS23212							
	14.0	9.0 - 11.0	10AS23214							
4.0	6.0	1.0 - 3.0	4.1	12.0	1.5	2.15	27	1800	1250	10AS24006
	8.0	3.0 - 5.0	10AS24008							
	10.0	5.0 - 6.5	10AS24010							
	12.0	6.5 - 8.5	10AS24012							
	14.0	7.5 - 9.5	10AS24014							
	16.0	8.5 - 12.5	10AS24016							
	18.0	10.5 - 14.5	10AS24018							
	20.0	12.5 - 16.5	10AS24020							
4.8	8.0	2.5 - 4.0	4.9	14.0	1.6	2.63	28	2600	1850	10AS24808
	10.0	4.0 - 6.0	10AS24810							
	12.0	6.0 - 8.0	10AS24812							
	14.0	7.0 - 9.0	10AS24814							
	16.0	8.0 - 12.0	10AS24816							
	18.0	11.0 - 13.0	10AS24818							
	20.0	12.0 - 15.0	10AS24820							
	22.0	14.0 - 17.0	10AS24822							
	24.0	15.0 - 19.0	10AS24824							
	25.0	15.0 - 20.0	10AS24825							
	26.0	16.0 - 18.0	10AS24826							
	28.0	18.0 - 22.0	10AS24828							
30.0	20.0 - 25.0	10AS24830								
35.0	25.0 - 30.0	10AS24835								

Q-STANDARD





Body: **Aluminium**
Stem: **Steel**
Large head







Hülse: **Aluminium**
Dorn: **Stahl**
Großkopf

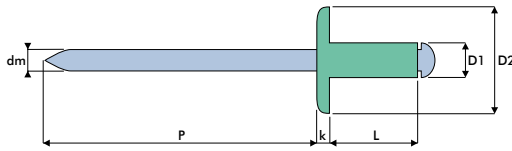

Cuerpo: **Aluminio**
Vástago: **Acero**
Remache cabeza ancha



DIN EN ISO 15977

D1	L	 min - max	 mm	D2	k	dm	p	 [N]	 [N]	code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
5.0	8.0	2.5 - 4.0	5.1	14.0	1.6	2.63	28	3100	2150	10AS25008
	10.0	4.0 - 6.0								10AS25010
	12.0	6.0 - 8.0								10AS25012
	14.0	7.0 - 9.0								10AS25014
	16.0	8.0 - 12.0								10AS25016
	18.0	11.0 - 13.0								10AS25018
	21.0	13.0 - 16.0								10AS25021
	24.0	15.0 - 19.0								10AS25024
	27.0	20.0 - 22.0								10AS25027
	30.0	20.0 - 25.0								10AS25030