





Body: **Aluminium**  
Stem: **Steel**  
Dome head







Hülse: **Aluminium**  
Dorn: **Stahl**  
Flachrundkopf

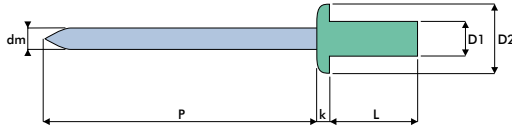

Cuerpo: **Aluminio**  
Vástago: **Acero**  
Remache alomada



DIN EN ISO 15973

D1	L	 min - max	 mm	D2	k max.	dm ref.	p min.	 [N]	 [N]	code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
3.2	6.5	0.5 - 2.0	3.3	6.1	2.0	1.75	26	1450	1100	20AS13206
	8.0	2.0 - 3.5								20AS13208
	9.5	3.5 - 5.0								20AS13209
	10.5	5.0 - 6.5								20AS13210
	12.5	6.5 - 8.0								20AS13212
4.0	8.0	1.0 - 3.5	4.1	8.0	1.3	2.15	27	2200	1600	20AS14008
	9.5	3.5 - 4.5								20AS14009
	11.0	4.5 - 6.5								20AS14011
	12.5	6.5 - 8.0								20AS14012
	15.0	8.0 - 10.0								20AS14015
4.8	8.0	1.0 - 3.0	4.9	9.6	1.7	2.63	28	3100	2200	20AS14808
	9.5	3.0 - 5.0								20AS14809
	11.0	5.0 - 6.5								20AS14811
	*	12.5	6.5 - 7.5							20AS14812
		14.0	7.5 - 9.0							20AS14814
6.4	12.5	1.5 - 6.5	6.5	13.0	1.3	3.65	30	4900	3600	20AS16412
	16.0	6.5 - 9.5								20AS16416
		18.0	11.0 - 13.0							20AS14818
		21.0	13.0 - 16.0							20AS14821
		25.0	16.0 - 20.0							20AS14825