




# JRV PRODUCTS

bevestigingsmateriaal.nl

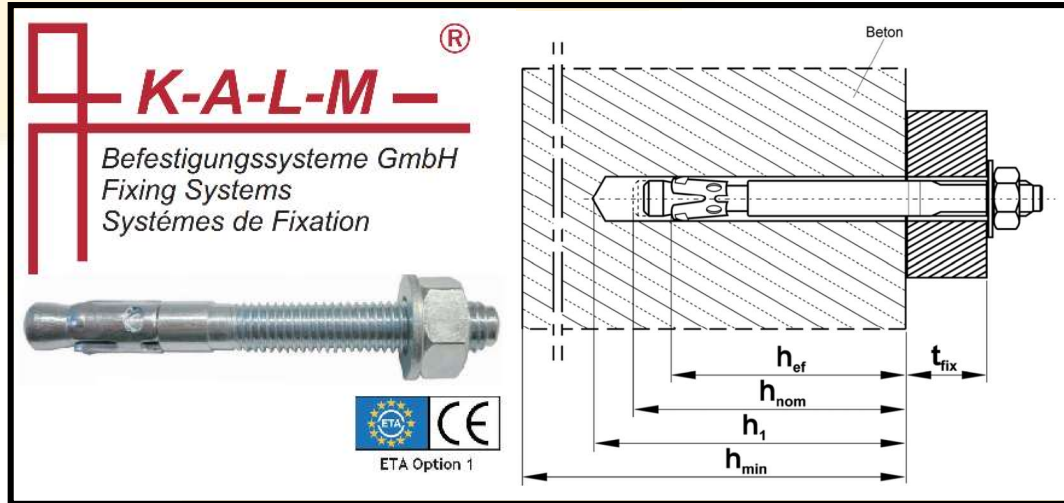

## Montage gegevens

Ankermaat			M8	M10	M12	M16
Boordiameter	$d_o =$	mm	8	10	12	16
Boorgatdiepte	$h_1 \geq$	mm	65	70	90	110
Anker zetdiepte	$h_{nom}$	mm	55	60	80	100
Effectieve verankeringsdiepte	$h_{ef}$	mm	45	50	65	80
Montagedikte	$t_{fix}$	mm	1-285	1-340	1-460	1-400
Diameter doorsteekgat montagedeel	$d_r \leq$	mm	9	12	14	18
Aandraaimoment in ongescheurd beton	$T_{inst}$	Nm	15	30	50	100
Aandraaimoment in gescheurd beton	$T_{inst}$	Nm	20	40	65	130

## Minimumdikte en minimale as- en randafstanden

Ankermaat			M8	M10	M12	M16
Minimum betondikte	$h_{min}$	mm	100	100	130	160
Minimale as afstand	$s_{min}$	mm	50	55	100	90
Minimale rand afstand	$c_{min}$	mm	60	100	150	110