


Karabijnhaak standaard model RVS-A4

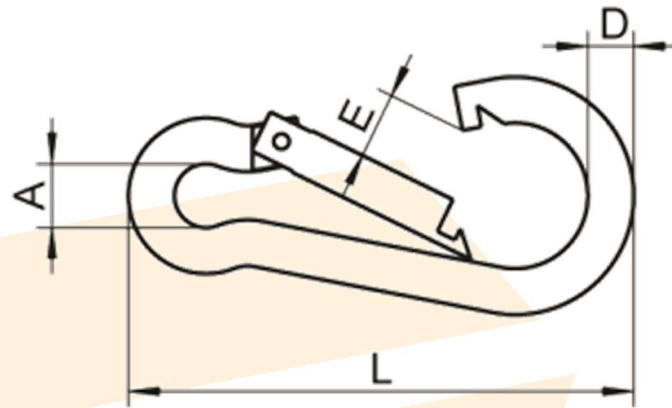

L (mm)	D (mm)	A (mm)	E (mm)	Veilige Werklast (kg)	Minimale Breukbelasting (kN)
30	3	5	5	15	0,6
40	4	6,5	6	48	1,9
50	5	8	7	71	2,8
60	6	9	8	99	3,9
70	7	10,5	8	138	5,4
80	8	12	9	176	6,9
100	10	15	12	237	9,3
120	11	18	16	265	10,4
140	12	20	19	288	11,3