





Body: **Aluminium**
Stem: **Aluminium**
Dome head







Hülse: **Aluminium**
Dorn: **Aluminium**
Flachrundkopf

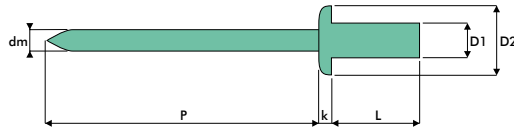

Cuerpo: **Aluminio**
Vástago: **Aluminio**
Remache alomada



DIN EN ISO 15975

D1	L	 min - max		D2	k	dm	p	 [N]	 [N]	code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
3.2	6.0	0.5 - 2.0	3.3	6.1	1.3	1.80	26	540	460	20AA13206
	8.0	2.0 - 3.5								20AA13208
	9.5	3.5 - 5.0								20AA13209
	10.0	5.0 - 6.5								20AA13210
	12.5	6.5 - 8.0								20AA13212
4.0	8.0	1.0 - 3.5	4.1	8.0	1.6	2.20	27	760	720	20AA14008
	9.5	3.5 - 4.5								20AA14009
	11.0	4.5 - 6.5								20AA14011
	12.5	6.5 - 8.5								20AA14012
	15.0	8.5 - 10.5								20AA14015
4.8	8.0	1.0 - 3.0	4.9	9.6	2.0	2.65	28	1400	1000	20AA14808
	9.5	3.0 - 4.5								20AA14809
	11.5	4.5 - 6.5								20AA14811
	12.5	6.0 - 7.5								20AA14812
	14.5	7.5 - 9.0								20AA14814
	16.0	9.0 - 11.0								20AA14816
	18.0	11.0 - 13.0								20AA14818
	21.0	13.0 - 16.0								20AA14821
25.0	16.0 - 20.0								20AA14825	