




Body: **Aluminium**
Stem: **Steel**
Dome head



Hülse: **Aluminium**
Dorn: **Stahl**
Flachrundkopf



Cuerpo: **Aluminio**
Vástago: **Acero**
Remache alomada

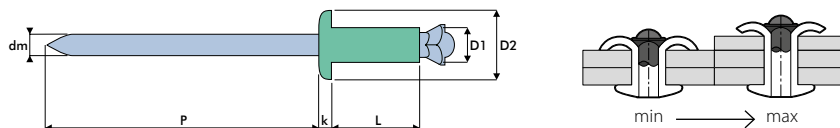

D1	L	 min - max	 mm	D2	k max.	dm ref.	p min.	 [N]	 [N]	code
mm	mm	mm	mm	mm	mm	mm	mm	[N]	[N]	
3.2	8.0	0.0 - 1.0	3.6 - 3.7	6.3	2.0	1.92	26	700	765	30AS13208
	10.0	1.0 - 3.0								30AS13210
	12.0	3.0 - 5.0								30AS13212
	14.0	5.0 - 7.0								30AS13214
	16.0	7.0 - 9.0								30AS13216
	18.0	9.0 - 11.0								30AS13218
4.0	10.0	1.0 - 3.0	4.4 - 4.5	8.0	2.0	2.30	27	1150	1260	30AS14010
	12.0	3.0 - 5.0								30AS14012
	14.0	5.0 - 7.0								30AS14014
	16.0	7.0 - 9.0								30AS14016
	18.0	9.0 - 11.0								30AS14018
	20.0	11.0 - 13.0								30AS14020
	25.0	13.0 - 18.0								30AS14025
30.0	18.0 - 23.0								30AS14030	
4.8	10.0	1.0 - 3.0	5.2 - 5.3	9.5	2.0	2.63	28	1600	1690	30AS14810
	12.0	3.0 - 5.0								30AS14812
	14.0	5.0 - 7.0								30AS14814
	16.0	7.0 - 9.0								30AS14816
	18.0	9.0 - 11.0								30AS14818
	20.0	11.0 - 13.0								30AS14820
	22.0	13.0 - 15.0								30AS14822
	25.0	16.0 - 18.0								30AS14825
	30.0	19.0 - 24.0								30AS14830
	35.0	24.0 - 29.0								30AS14835
	40.0	29.0 - 33.0								30AS14840
50.0	33.0 - 40.0								30AS14850	